Modular check valve

Technical specification

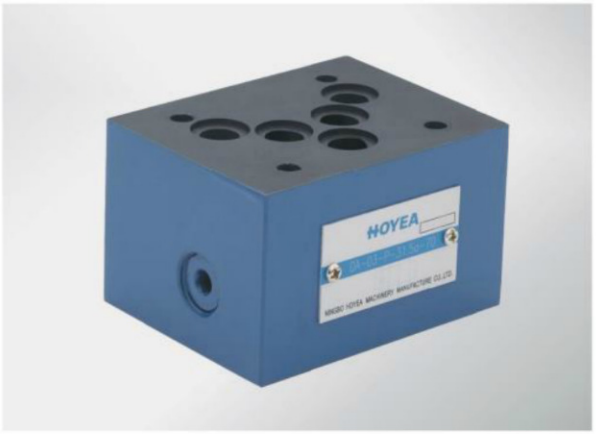

Specification	02	03
Max. working pressure (MPa)	31.5	
Max. Flow (L/min)	40	100
Working fluid	Mineral oil; phosphate-ester	
Fluid temp. (℃)	-20~70	
Viscosity (mm^2/s)	2.8~380	
O pening pressure (MPa)	a:0.05 b:0.25 c:0.4	
Weight (kg)	1	2.7
Cleanliness	The maximum allowable cleanliness of the oil should be according to 9th degree of Standard NAS1638.It is suggested that the minimum filter rating should be β 10≥75.	

Model description

DA – ＊ ＊ – ＊ / ＊ 70 ＊

Modular check valve

Specification
02 NS 6
03 NS 10

P P Pipeline
T T Pipeline
A A Pipeline
B B Pipeline
W W Pipeline

Seal material
Omit NBR Seals
V FPM Seals

O pening pressure
a 0.05
b 0.25
c 0.4

Serial number

Remarks

Code symbol

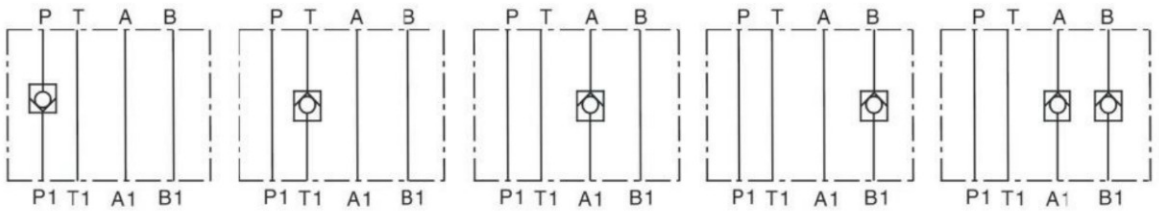

P Pipeline T Pipeline A Pipeline B Pipeline W Pipeline