Modular reducing valve

Technical specification

Specification		02	03
Max. working pressure	(MPa)	21	
Max. Flow	(L/min)	35	70
Working fluid		Mineral oil;phosphate-ester	
Fluid temp.	(℃)	-20~70	
Viscosity	(mm^2/s)	12~380	
Working press	(MPa)	7 14 21	
Weight	(kg)	1.29	3.39
Cleanliness	The maximum allowable cleanliness of the oil should be according to 9th degree of Standard NAS1638.It is suggested that the minimum filter rating should be β 10≥75.		

Model description

DYJ - * * - * - * / * 70 *

Modular reducing valve

Specification
02 NS 6
03 NS 10

P P Pipeline relief
A A Pipeline relief
B B Pipeline relief

Working pressure
7 to7MPa
14 to14MPa
21 to21MPa

Remarks

Serial number

Seal material
Omit NBR Seals
V FPM Seals

8 Handle
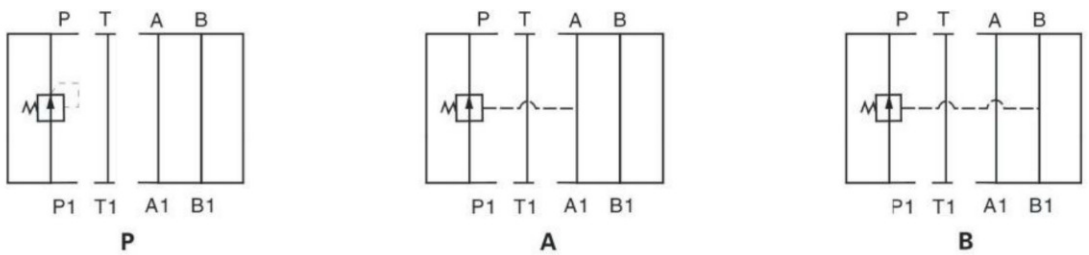
Code symbol